
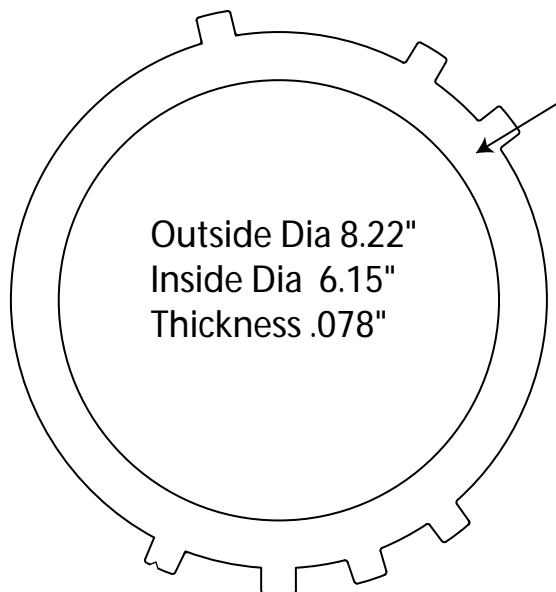



DISHED

THM 350 Intermediated Steel

This is the real fix for clicking noise in 1st gear,



Superior surface finish for greater
apply area and friction clutch life

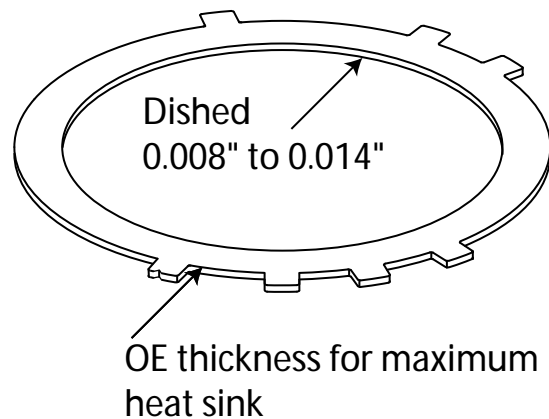

TIPS TO REMEMBER:

1. OE part numbers 6261450 or 8640672
2. OE steel plates were dished 0.008 - 0.014 " to prevent dicking in 1st gear
3. Use new steels when possible, but do not buff, sand or tumble any steel
4. Do not compromise your rebuilds with other "fixes"